

SUZUMAR

suzuki.hu/marine

You Tube



SUZUKI SUZUMAR INFLATABLES



Way of Life!



Our range of products was developed so we could cater to the European customer seeking high-quality boats which, when equipped with our SUZUKI outboard motors, give an excellent value for the money.

The boats resemble the proven Italian design, thus they stand both for great stability and simple operation. More than one motor is suitable for each boat. Each combination equipped with a SUZUKI motor will deliver excellent performance each time. The main characteristics of the motors are: simple start, low fuel consumption and low exhaust emissions, and also low vibration and quiet operation.

Every boat is made from durable, reinforced three-layer PVC. The rigid inflatable boat hulls are made of glass-reinforced resin, giving them a high degree of stability and durability. The two smallest inflatables have inflatable floors, too, while the larger ones are supplied with low-maintenance aluminum floors, giving the extra stability needed for outstanding performance in more extreme circumstances. Every package contains the stainless steel fittings, the wooden seats, the oars, a repair kit, a foot pump and a carrying bag. Further accessories are available for order at the SUZUKI MARINE Authorized Dealerships.

THE GREATLY SUCCESSFUL SUZUMAR HULLS WITH OPTIONAL SUZUKI MOTORS ARE NOW AVAILABLE IN NEW DESIGNS. THE NEW BOATS OFFERED ARE THE TWO RIBS (RIGID INFLATABLE BOATS). YOU CAN NOW CHOOSE FROM MORE THAN EIGHT SUZUMAR MODELS.

SUZUMAR TECHNICAL SPECIFICATIONS

Model	DS230	DS265
Total length (cm)	228	270.5
Internal length (cm)	135	171
Total Width (cm)	133.5	153
Tube diameter (cm)	36.5	42.5
Transom height (cm)	38	38
Transom angle (degrees)	5 - 8	5 - 8
Dry weight (kg)*	26.0	32.0
Air chambers	3+2	3+2
Maximum persons	2.5	3.5
Maximum load capacity (kg)	400	550
Floor type	Inflatable floor	Inflatable floor
Outboard motor (HP)	2.5 - 5	4 - 8
Tube/Keel pressure (bar)	0.25/0.35	0.25/0.35

230KIB



265KIB



The SUZUMAR 230 and 265 can be equipped with different outboards.

These small, modern boats are equipped with a comfortable air cushion floor and inflatable keel, which ensure adequate stability and perfect planing. Both models comfortably fit into a carrier bag and are therefore easy to transport and store. Features include stainless steel D rings for lifting and towing, a high durability transom face plate, all around rope grab handles, a thwart seat and oars. A foot pump, a mooring rope and spare parts come as standard.

DS230KIB, DS265KIB

Note: Always use a pressure gauge when inflating SUZUMAR boats. The best performance and durability of the hull can only be obtained at the correct pressure.
* Dry weight does not include accessories

SUZUMAR TECHNICAL SPECIFICATIONS

Model	DS290AL	DS320AL
Total length (cm)	289.5	318
Internal length (cm)	182.5	208
Total width (cm)	154.5	154
Tube diameter (cm)	42.5	43
Transom height (cm)	38	38
Transom angle (degrees)	5 - 8	5 - 8
Dry weight (kg)*	47.0	52.0
Air chambers	3+1	3+1
Maximum persons	4	4.5
Maximum load capacity (kg)	500	620
Floor type	Aluminum floor	Aluminum floor
Outboard motor (HP)	4 - 9.9	4 - 15
Tube/Keel pressure (bar)	0.25/0.35	0.25/0.35

290AL



320AL



SUZUMAR boats for family, touring and sporting purposes with aluminum flooring. Types include the following: 290/320/360/390/420

These boats have been designed specifically for families, touring and sporting purposes. The aluminum floors have aluminum stringers for low maintenance and high durability, but also provide the stability needed for more demanding performances and conditions. All models have an inflatable keel for great stability. We recommend the powerful four-stroke SUZUKI outboards for these high-quality inflatable boats.

DS290AL, DS320AL

SUZUMAR TECH. SPECIFICATIONS

Model	DS360AL	DS390AL	DS420AL
Total Length (cm)	356	379	418
Internal Length (cm)	238	254.5	308
Total Width (cm)	173	173	201
Tube diameter (cm)	45	45	53
Transom height (cm)	38	38	38
Transom angle (degrees)	5 - 8	5 - 8	5 - 8
Dry weight (kg)*	67.0	69.0	91.0
Air chambers	3+1	3+1	3+1
Maximum persons	5	5.5	7
Maximum load capacity (kg)	700	780	1000
Floor type	Aluminum floor	Aluminum floor	Aluminum floor
Outboard motor (HP)	6 - 15	6 - 25	8 - 25
Tube/Keel pressure (bar)	0.25/0.35	0.25/0.35	0.25/0.35

360AL



390AL



420AL



The three largest models are true touring boats - exciting and fast. Their spacious and comfortable design makes them ideal for longer trips and greater speeds alike. As with all SUZUMAR inflatable boats, these also have three separate air chambers and an inflatable keel to ensure greater safety.

All models come equipped with a high-durability transom face plate. They come with D rings for mooring and transom eyebolts on the face plate, D rings for lifting at the nose, all-around rope grab handles on the hull, thwart seats and oars, carrying bag, repair kit, foot pump and mooring rope.


DS360AL, DS390AL, DS420AL

Note: Always use a pressure gauge when inflating SUZUMAR boats. The best performance and durability of the hull can only be obtained at the correct pressure.
* Dry weight does not include accessories

SUZUMAR 270RIB, 310RIB AND 350RIB TECHNICAL SPECIFICATIONS

Model	DS270	DS310	DS350
Total length (cm)	268	309	348
Internal length (cm)	188	220	261
Total width (cm)	154	152	176
Tube diameter (cm)	41.5	42.0	43.5
Transom height (cm)	39.2	39.2	39.2
Transom angle (degrees)	80	80	80
Dry weight (kg)	42	67	73
Air chambers	3	3	3
Maximum persons	3	3.5	4
Maximum load capacity (kg)	510	620	600
Floor type	GFK	GFK	GFK
Outboard motor (HP)	4 - 10	4 - 15	5 - 15
Tube pressure (bar)	0.25	0.25	0.25
Hull pressure (bar)	0.80	0.80	0.80
Motor performance	4 - 9.9 HP	4 - 15 HP	5 - 25 HP

270RIB

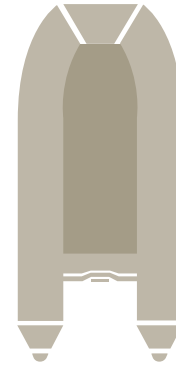

310RIB



350RIB



Boating is made easy with our boats, and maneuvering with them is easy, too. Our boats provide high performance and safety. The hull is constructed from double-molded fiber glass reinforced resin without using stitches, which ensures great stability and is lighter than a traditional double-molded hull.

With regards to material and equipment requirements, these rigid inflatables meet the same strict standards as the other inflatable boats. They come equipped with high a high-durability transom face plate, D rings for mooring, transom eyebolts on the face plate and hull floor for lifting, all-around rope grab handles, thwart seat and oars. The pump, repair kit and oars come as standard.

We hope you will enjoy our rigid inflatable boats for years to come.

DS270RIB, DS310RIB, DS350RIB

SUZUMAR 310VIB AND 350VIB V HULL INFLATABLE BOATS TECHNICAL SPECIFICATIONS


Model	DS310	DS350
Total length (cm)	310	356
Internal length (cm)	213	238
Total width (cm)	156	172
Tube diameter (cm)	43.5	45.0
Transom height (cm)	41.0	41.0
Transom angle (degrees)	80	80
Dry weight (kg)	31.46	43.37
Air chambers	3+2	3+2
Maximum persons	3	5
Maximum load capacity (kg)	620	900
Floor type	DWF	DWF
Outboard motor (HP)	4 - 10	6 - 15
Tube pressure (bar)	0.25	0.25
Hull pressure (bar)	0.80	0.80
Motor performance	4 - 9.9 HP	6 - 15 HP

Please note: Dry weight does not include weight of accessories such as seat, pump, oars and repair kit. With all inflatables it is important to use a pressure gauge when inflating to ensure and maintain the correct pressure and obtain the best performance and durability.

310VIB



350VIB

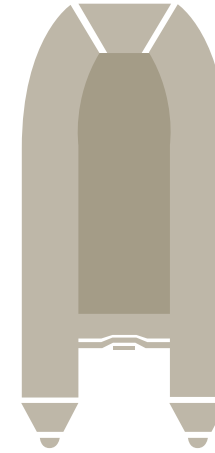

Every model comes with four stainless steel D rings for lifting and mooring. Packing the boats is easy and quick, it takes only a few minutes, and each boat fits into the provided bag snugly. Other supplied basic items are: a pair of oars, a thwart seat, a repair kit and a high-performance foot pump. The large, conically connected air chambers made of durable, three-layer PVC fabric reinforced with wide rubbing strakes. The floor is made of a double-layer polyester-filled fabric, with an outer layer made of strong and durable Shafer fabric. Both these features greatly increase the lifetime of the product.

These new, modern boats combine the advantages of inflatables – easy transportation, storage and assembly – with the performance of rigid inflatable boats (RIBs). Thanks to the inflatable integrated floor and the V hull, the boat is as rigid and strong as a traditional rigid inflatable boat. Good aerodynamic characteristics make the boat stable at any speed and during heavier use. These 3.10 and 3.56 meter ships are greatly suitable for sport or for family fun.

DS310VIB, DS350VIB

Note: Always use a pressure gauge when inflating SUZUMAR boats. The best performance and durability of the hull can only be obtained at the correct pressure.
* Dry weight does not include accessories

ASSURANCE GUARANTEED

SUZUMAR inflatable boats and reinforced inflatable boats are recommended to be equipped with short-shaft SUZUKI outboard motors. SUZUMAR provides a 3-year guarantee against any defects in the material and craftsmanship errors. SUZUMAR is CE certified by Germanischer Lloyd Holding in Germany.

This way every SUZUKI outboard motor and SUZUMAR inflatable has a 3-year guarantee period.

Warning: Read the instructions before starting to operate the boat. Adhere to all safety precautions and respect the rights of other sportspeople in the water. Always wear appropriate apparel, such as a personal floatation device. Only operate your outboard motor and craft safely, in accordance with the manufacturer's recommendations, and take no risks. Always remember that trainings improve skills, and this goes for both novice or expert-level users. Never operate a boat under the influence of alcohol or narcotic drugs. If necessary, consult your local authorized SUZUKI MARNIE dealer for advice on correct outboard motor choice and correct maintenance. The maneuvering pictures herein took place under controlled conditions with professional operators.

Your **AUTHORIZED SUZUKI Dealer:**

Never attempt any action potentially dangerous or beyond your level of skill.

SUZUKI/SUZUMAR reserves the right to change, without prior notice, the equipment, technical specifications, colors, materials and other components according to applicable local regulations. Any model may be discontinued without prior notice. Please contact the local SUZUKI MARINE dealer for details of any such changes.

Actual body colors may differ slightly from the colors in this brochure. The photos are illustrations. Contents of the brochure do not constitute an offer.

We exclude all liability due to potential errors in translation and/or printing.

© Magyar Suzuki Zrt., 2015.

ATTENTION! Products in this brochure are imported to Hungary by Magyar Suzuki Zrt., whose domestic sales channel is the Official Suzuki Marine Dealer Network, available at <http://www.suzuki.hu/marine/hu/markakereskedok/>. For purchases from any other source we exclude liability for full compliance with the guarantee terms; compliance with the quality, specifications and trim levels, and compliance and existence of official marks, as well as for the existence of the trim level and supplementary parts related to the products! Please consider this in due time before making a purchase from doubtful or unreliable sources that fail to provide all of the above parameters: these are guaranteed by our domestic importer dealership network!

WATCH OUT! Sadly, Suzuki Marine products from doubtful sources are, on numerous occasions and in many ways, copies; their trim levels are modified, many times their elements, parts, specifications, compliance and official marks are incomplete and/or prove to be falsified; their quality is sometimes inadequate, and have limited or no warranty service!

YOU DECIDE - we deliver FOR SURE!

Magyar Suzuki Zrt. - Suzuki Marine Motorcycle & Outboard Engine Sales Dept.



Magyar Suzuki Zrt.
2500 Esztergom,
Schweidel József str. 52
www.suzuki.hu

SUZUMAR

suzuki.hu/marine