

SUZUKI MOTORCYCLE 2018

*Image shown with optional accessories

SUZUKI's Slogan

RUN

01

Our top priority is ensuring a great ride for all users. Suzuki's product creation efforts center firmly on the user, and we have developed our unique technologies over the years based on this approach. By feeling like one with the bike, the user's ride becomes that much more thrilling. Here at Suzuki, we never stop evolving. *Image shown with optional accessories.

TURN

02

03

STOP

RUN

Through enhancement of every aspect of the bike's ride coupled with tireless pursuit of optimal engine design that achieves both powerful drive and excellent environmental performance, we strive to revolutionize the way people enjoy our products and create beautiful ride experiences.

01

02

03



TURN

By providing smooth cornering and a greater sense of integration between machine and rider to make the act of maneuvering the vehicle more fun, we offer the joy of unrestrained, completely free control over one's movement.

OUR MANUFACTURING SPIRIT POWERS YOUR SUZUKI.

Providing 'value-packed products'

In our 109 years of manufacturing history, 66 years of building motorcycles, we have always strived to provide 'value-packed products' as one of our manufacturing philosophies. We believe that our passion, enthusiasm turns into your fun and excitement, our pride of craftsmanship becomes your pride of ownership.

The trademark " * " is recognized by people throughout the world as brand of quality products that offer both reliability and originality. Suzuki stands behind this global symbol with a sure determination to maintain this confidence in the future as well, never stopping in creating 'value-packed products'.

STOP

Efficient braking makes a better ride and superior cornering possible. Stopping ability unifies the will of the rider and movements of the bike, making for more comfortable riding in a wide range of different situations.



Image shown with optional acces

1952

Suzuki builds its first motorised bicycle, the 'Power Free'. Designed to be inexpensive and easy to maintain, it uses a 36cc, two-stroke engine clipped to the frame of a conventional bicycle. The Power Free's unique double sprocket gear system allows riders to pedal without engine assistance, with engine assistance, or to travel completely under the engine's own power.

S O

1962

Champions of the world! East German rider, Ernst Degner, takes Suzuki's first TT victory by winning the 50cc race. He goes on to win the 50cc world championship in the same year giving Suzuki its first world title. Five more 50cc titles will follow in the next six years.

1971

Joel Robert retains the world 250cc motocross crown. Roger De Coster becomes the World Motocross Champion 500cc class on his Suzuki RN71.



1981

Italy's Marco Lucchinelli wins the 500cc world championship on an RG500.

Suzuki stuns the biking world with its futuristic GSX1100S Katana. The bike's aggressive styling and superb performance make it a huge sales success.



1993

Kevin Schwantz wins the 500cc world championship on the RGV- γ 500 and ensures his name will always be remembered amongst the all-time greats.



1900 1950

SUZUKI

HISTORY

History progressed with customers worldwide.



1909

Michio Suzuki opens the Suzuki Loom Works in the small coastal village of Hamamatsu, Shizuoka Prefecture, Japan. The new factory makes weaving looms for Japan's massive cotton industry and Michio's intention is simple: to build better, more ergonomic looms than anything that is currently available.



1958 The now famous Suzuki 'S' makes its first appearance.



1970

1965

Hugh Anderson wins his fourth world title, this time in the 125cc class. The sensational T20 Super Six really puts Suzuki on the international map. A 250cc, two-stroke twin with six-speed gear box and a claimed top speed of 160km/h, the T20 is a huge sales success.



1980

1976

Barry Sheene wins his, and Suzuki's, first 500cc world title on the RG500. The legendary bike took the top six places in the championship.

Meanwhile, the GS750 - Suzuki's first big four-cylinder bike - is released.



1990

1985

The bike that is to change the face of motorcycling arrives. Suzuki's GSX-R750 will always be remembered as the first true race replica machine. Delivering 100 horsepower and weighing in at 176kg, it created a whole new category of performance bikes. The GSX-R750 achieves a 1-2 finish in its World Endurance Championship debut race, the Le Mans 24-hours Endurance Race.



1960

2001

An unforgettable year which saw the launch of the ultimate sports bike the Suzuki GSX-R1000. The newest addition to the GSX-R family had the same impact as the original upon its release in 1985 and re-wrote the rule books on performance, weight, handling and styling. It would soon be dominating race tracks and awards ceremonies around the world.



2008

The Suzuki B-King, a naked muscle bike with attitude, first shown as a concept model in 2001, arrives. Suzuki launches the Worlds first production fuel injected motocross bike - the RM-2450. In the same year, Suzuki launches the new GSX-R600 and 750 models - the thinking mans sportsbikes. Suzuki introduces 2nd generation Hayabusa 1300.



2012

GSX-R series total production reaches 1 million units. Since the introduction in 1985, the name of GSX-R became synonymous with high performance sportbike. Suzuki launches second generation V-Strom 650ABS. V-Strom 650 has always been the best-selling model in its class since first introduced in 2004. To further improve its running performance and riding comfort, 645cc V-Twin engine has improved low-to-mid rpm performance, matched by enhanced fuel economy and environmental performance.



2010



The all new GSX-R1000/R, Suzuki flagship model is finally launched. In addition, V-Strom 1000/XT, V-Strom 650/XT, GSX-S750, BURGMAN 400 etc., the total 9 new models are introduced. In MotoGP, Team SUZUKI ECSTAR, Maverick Viñales wins the championship at the British Grand Prix with GSX-RR in the second season after coming back.





1999

Suzuki breaks the mould once again

with the unveiling of the GSX1300R

4-cylinder engine that powered the Hayabusa represented the epitome

of no-compromise engineering. The

were its aerodynamic design and its

performance and handling in a wide

Hayabusa's most notable features

superb balance of the engine

speed range on the road.

Hayabusa. The ultimate 1298cc

liquid-cooled DOHC in-line

1996

Suzuki re-invented GSX-R750 again in 1996. This is the turning-point model of the GSX-R750 with the newly equipped twin-spar frame instead of the double cradle frame. Faithfully tracing the GP machine RGV-F, the basic dimensions with shortened wheelbase generated smooth drivability with a surprising dry weight of 179kg.



2000

2000

Kenny Roberts Jr. wins 2-year consecutive victory in the Malaysian GP, the season's 2nd round. With a total of four victories, Roberts Jr. becomes the World Champion of GP500, which for Suzuki is the sixth world title, and the first in seven years since 1993.



2005

Suzuki sets new standard of sportbike once again with the introduction of the 2005 GSX-R1000. It went straight back to the top of the superbike tree. The GSX-R1000 wins number of Superbike titles including World Superbike Championship in 2005. The reasons for the Suzuki GSX-R1000's dominance are simple. Great handling and ergonomics, radical styling and full-on usable power.



2009

The all new GSX-R1000 is launched. In the United States, Rockstar Makita Suzuki's Mat Mladin clinches his seventh AMA Superbike Championship riding GSX-R1000.




2013

The Suzuki Endurance Racing Team (SERT) takes its 4th consecutive Endurance World Championship and its 13th title overall.



2017 Suzuki GSX-R1000 and Michael Dunlop take victory at the Isle of Man Senior TT.

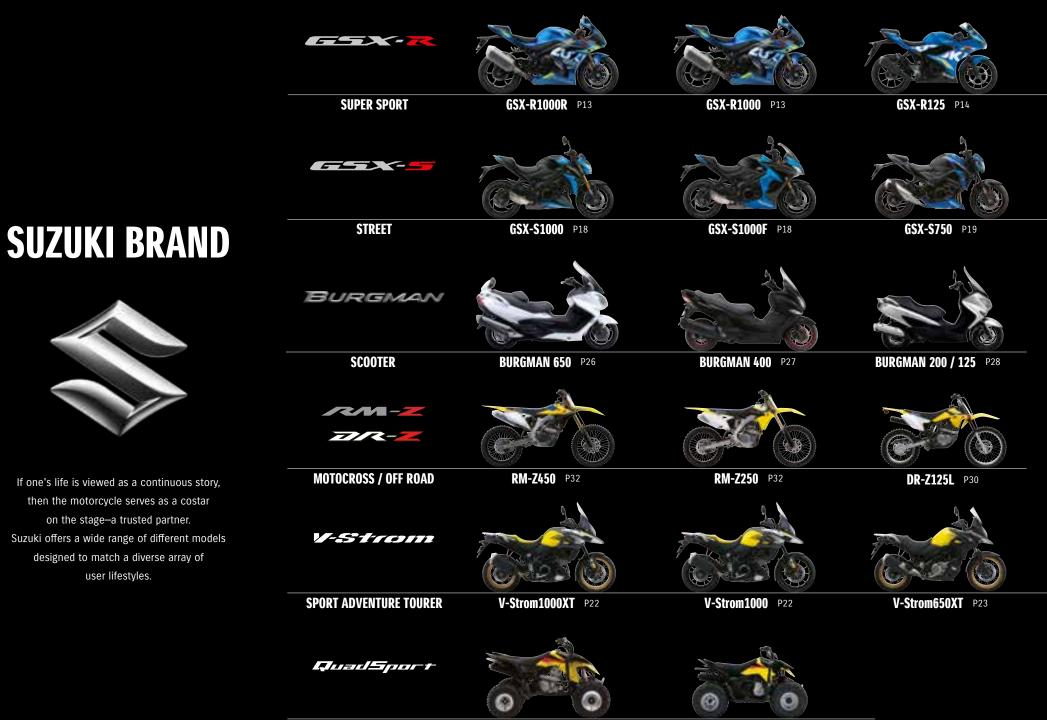

SPORT and KIDS ATV

QuadSport Z400 P36

QuadSport Z90 P36





GSX250R P20





STREET



SV650 P17





SCOOTER



V-Strom650 P23











UTILITY ATV

KINGQUAD 750AXi P34

UTILITY ATV

LT-F250 P34

SUZUKI **TECHNOLOGY IS RIGHT BEHIND YOU**





Suzuki Racing Variable Valve Timing Suzuki Racing Variable Valve Timing (SR-VVT) System developed for Moto GP racing. Unlike complicated variabl valve timing systems used by other manufactures, the SR-VVT is simpler, more compact, lighter and more positive. The centrifugally operated

system is built into the intake cam

butterfly valve operated by servo back pressure and work with press waves to add significant power at system is built into the intake cam sprocket and an adjacent guide plate, using 12 steel balls and slanted grooves to rotate the sprocket and retard the intake valve timing at a pre-set rpm, adding significantly to high-rpm power.

Suzuki Exhaust Tuning Alpha

closes, increasing back pressure and improving low-end torque. The valve progressively opens as engine speed increases, reducing back pressure and increasing midrange and high-rpm power.

Suzuki Exhaust Tuning

optimized spray pattern designed to

A. S-TFI

Suzuki Top Feed Injector

TECHNOLOGY

Suzuki motorcycle offers variety of advanced technologies - which not only deliver high performance, excitement and satisfaction, but increase your comfort and convenience in every day riding. Your riding experience will be further enhanced with these advanced





Suzuki Clutch Assist System


Suzuki Clutch Assist System (SCAS) - a back-torque-limiting clutch helps make downshifts smoother, assists the rider in taking control in deceleration. Ramped engagement cams built into the clutch hub decrease force on the clutch plates under deceleration by pushing up against the pressure plate, allowing the plates to slip at a controlled rate



Motion Track Brake System

"Motion Track Brake System" by installing a Inertial Measurement Unit (IMU), and by combining the information of the posture of the vehicle with the front and rear wheel speeds, have made it possible for the ABS to activate not only in a straight





An electrically controlled Antilock Brake System (ABS) that produces stable conditions. The system helps avoid wheel locking when there is a sudden change in road surface during braking or when an excessive braking force is applied. The per wheel rotation, and matches stopping power to available traction. * Depending on road surface conditions, such as

wheel skidding caused by braking while cornering. Please drive carefully and do not overly rely on ABS



Motion Track Traction Control System

Suzuki's advanced Motion Track Traction Control System(TCS) allows the rider to select different levels of traction control intervention, depending upon road or racetrack conditions as well as personal preference and experience level. The Motion Track TCS continuously throttle position, crankshaft position, gear position and motorcycle motion, and quickly reduces engine power output when a loss of traction is detected or motion of power enter the controlled by predicted. Power output is controlled by managing ignition timing and throttle valve position.



Suzuki's traction control system continuously monitors front and rear wheel speeds, throttle position

sensor, crank position sensor and gear position sensor, and quickly reduces engine output when wheel spin is detected. Engine output is controlled

by managing ignition timing and air

delivery to ensure smoother traction control operation. As a results rider can enjoy long distance riding more comfortable, with less stress and

Traction Control System





Launch Control System

Launch control system makes it easier for a racer to get a good start in closed-course competition by automatically limiting engine rpm and optimizing torque delivery while the rider holds the throttle twist grip wide open and concentrates on feeding in the clotte laws





Ride Bv Wire




S-DSI

Suzuki Dual-Stage Intake

system delivers the advantages of variable-length intake funnels (also known as velocity stacks) without the extra weight and complexity. Two of the four intake funnels use a new stacked, dual-stage design, wit

a longer funnel positioned above a



SDTV

Suzuki Dual

Throttle Valve system

digital fuel-injection system. In SDTV induction system, each throttle body barrel has two butterfly valves, a primary valve controlled by the twist grip and a secondary valve controlled by the ECM based on engine rum gear selection

based on engine rpm, gear selection and the position of the primary valve. The secondary butterfly valve opens and closes to maintain ideal intake air velocity, improving high combustion efficiency, thus resulting in a linear throttle response, increased low-to-mid range torque

Secondary butterby roles





Suzuki Composite Electrochemical Material (SCEM) is Suzuki's own nickel-silicon-carbide coating

nickel-silicon-carbide coating technique derived from racetrack experience. SCEM cylinders allow faster heat transfer and tighter piston-to-cylinder clearance, for supprb durability and resistance to

Suzuki Composite **Electrochemical Material**



Suzuki Drive Mode Selector

Sustain Johne Mode Selection (3-50M3) system allows the rider to select one of three fuel injection and ignition system maps (2maps in case of GSX-R750/600), adjusting power delivery to suit personal preference in various riding situations, such as different racetracks or tight, twisty roads. Selecting and switching between mode settings is by a switch on the handlebar: the selected mode

on the handlebar; the selected mode setting is displayed on the right side of the tachometer. The feature helps rider to enjoy the performance in a wider range of riding situations.



low from Assist uses the ISC mechanism to help raise engine rpm slightly in launching and riding at low speed. This new feature helps smoother operation when pulling away and when riding at slow speeds, this means it's easier to pull away and easier to control the engine in the start before.



Bi-Directional Ouick Shift System

The system automatically interrupts power delivery just long enough– between 50 and 75 milliseconds, between 50 and 75 milliseconds, depending upon the sensitivity adjustment-to unload the transmission gear dogs and allow a clean upshift, producing smoother, almost uninterrupted acceleration. For quicker and smoother downshifts without manually blipping the throttle twist grip or using the clutch, the system automatically opens the throttle valves just enough to increase rpm and match engine speed to the next-lower gear ratio.



On a normal motorcycle when starting the engine, the rider needs to press and hold the starter switch until the engine fires up. With the Suzuki Easy Start, all you need to do is one quick push of the starter switch, just like starting a modern car engine. The ECM recognizes the signals and keeps the starter motor working for a specified time.

position offering optimum intake efficiency. This results in better intake efficiency, increase engine power in high speed.

* The technology is used in GSX-R1000, 750, 600 and Havabusa.

key to prevent unauthorized people from starting the engine. * Not available for North American spec.

Only models with European specifications comply with the EURO 4 emission regulations.

The Suzuki Racing VVT (SR-VVT), Suzuki Exhaust Tuning-Alpha (SET-A), and Suzuki Top Feed Injector (S-TFI) systems combine to make the Broad Power System, increasing high-rpm performance without reducing low and mid-range performance. The result is strong, linear power and enhanced acceleration throughout the rpm range.

the quickest and strongest possible drive forward. The system returns the ignition timing to normal operation six seconds after launch, when the rider shifts into fifth gear, or when the throttle is closed, giving the rider ample time to bust out of the gate and toward the first turn.



The rider can start the engine as long as the compact key is close enough to the motorcycle. Which means the rider does not have to fumble to retrieve the compact key from a pocket or backpack.

8

SUPER SPORT

GSX-R1000R ABS GSX-R1000 ABS GSX-R125 ABS

SURURI



GSX-R SERIES





(GSX-R1000A/RA/RZA)

Own The Racetrack

It is a machine designed to turn a simple expression of what really matters --Run, Turn, Stop --into the powerful combination of acceleration, cornering, and braking that makes this the most awesome GSX-R ever produced. Offered with the certain knowledge that--if vou're ready--the GSX-R1000/R will Own The Racetrack.



Glass Sparkle Black (YVB) Photo : GSX-R1000RZA (GSX-R1000RZA Only)



Pearl Glacier White (YWW) Photo : GSX-R1000A



Metallic Mat Black (YKV) Photo : GSX-R1000A (GSX-R1000A Only)



Photo : GSX-R1000RA

Motion Track Motion Track Broad Pow Bi-directional R B C \bigcirc System •••• 卿 S-TFI Q SCEM S-DMS Ouick Shift System*1 TCS System*1 EASY START SAIS SCAS Brake System ARC TCS SRAD EURO4

| Engine Type | 4-stroke, 4-cylinder, liquid-cooled, DOHC |
|---------------------|--|
| Engine Displacement | 1 000 cm ³ |
| Bore x Stroke | 76 mm x 55.1 mm |
| Transmission | 6-speed constant mesh |
| Engine Power | 148,5 kW (202 PS) / 11 500 rpm |
| Engine Torque | 117,6 Nm / 10 800 rpm |
| Overall Length | 2 075 mm |

| Overall Width | 705 mm |
|------------------|---|
| Overall Height | 1 145 mm |
| Wheelbase | 1 420 mm |
| Ground Clearance | 130 mm |
| Seat Height | 825 mm |
| Curb Mass | 202 kg [GSX-R1000A] 203 kg [GSX-R1000RA/RZA] |
| Suspension Front | Inverted telescopic, coil spring, oil damped |

| | | *1 Only for GSX-R1000RA/RZA |
|----------------------|-------|------------------------------------|
| | Rear | Link type, coil spring, oil damped |
| Brakes | Front | Disc, twin |
| | Rear | Disc |
| Tires | Front | 120/70ZR17M/C (58W), tubeless |
| | Rear | 190/55ZR17M/C (75W), tubeless |
| Fuel Tank Capa | city | 16 L |
| Consumption* | | 5.9 L / 100 km |
| $\rm CO_2emission^*$ | | 137 g / km |

*Calculated based on the Worldwide Motorcycle Test Cycle (WMTC) mode exhaust emissions measuring conditions.



Compact Engine

(V.R)

The design team quickly settled on basic engine design goals. The engine would rev higher and make more peak horsepower, while maintaining excellent low-to-mid-range power and drive. It would be a compact and lightweight Inline Four, DOHC with chain cam drive and four titanium valves per cylinder set at narrow angles, with a more over-square bore/stroke ratio, a higher redline and a higher compression ratio.



IMU sensor to track motorcycle motion

The GSX-R1000's advanced electronic management system incorporates feedback from a Continental Inertial Measurement Unit (IMU) which tracks the motion and position of the motorcycle in 6-directions, along 3-axis, Pitch, Roll and Yaw.



Compact Chassis

The GSX-R1000's chassis is more compact and narrower than the previous model's chassis. Suzuki engineers designed a twin-spar aluminum perimeter frame that's 20 mm narrower at the widest point between the spars and weighs 10% less.



Superior Aerodynamics

The GSX-R1000 has MotoGP-inspired, sleeker and more aerodynamic bodywork designed to improve handling and top speed on the racetrack. *The model shown at this picture is L7 model.

GSX-R SERIES



A GSX-R to Revolutionize The Lightweight Class

The Suzuki GSX-R line has defined sportbike performance for over 30 years, with more than a million sold worldwide. So the dedicated Suzuki engineers who have devoted their lives to the GSX-R take their responsibilities very seriously: Every GSX-R must be very light and best performing motorcycle in its class, in an unbeatable package. Meet the revolutionary Suzuki GSX-R125, with the best power-to-weight ratio and acceleration in the 125cm³ class, plus nimble handling and great fuel economy.



Brilliant White (YUH) Photo : GSX-R125A








Photo : GSX-R125XA



| Engine Type | 4-stroke, 1-cylinder, liquid-cooled, DOHC |
|---------------------|--|
| Engine Displacement | 124 cm ³ |
| Bore x Stroke | 62 mm x 41.2 mm |
| Transmission | 6-speed constant mesh |
| Engine Power | 11 kW (15 PS) / 10 000 rpm |
| Engine Torque | 11,5 Nm / 8 000 rpm |
| Overall Length | 2 020 mm |

| Overall Width | | 700 mm |
|----------------|-------|-------------------------------------|
| Overall Height | | 1 075 mm |
| Wheelbase | | 1 300 mm |
| Ground Clearar | nce | 160 mm |
| Seat Height | | 785 mm |
| Curb Mass | | 134 kg |
| Suspension | Front | Telescopic, coil spring, oil damped |
| | Rear | Link type, coil spring, oil damped |

| Brakes | Front | Disc |
|---------------------------|-------|-----------------------|
| | Rear | Disc |
| Tires | Front | 90/80-17M/C, tubeless |
| | Rear | 30/70-17M/C, tubeless |
| Fuel Tank Capa | city | 11 L |
| Consumption* | | 2.3 L / 100 km |
| CO ₂ emission* | | 54 g / km |
| | | |

*Calculated based on the Worldwide Motorcycle Test Cycle (WMTC) mode exhaust emissions measuring conditions.





SPORT ADVENTURE

SCOOTER

OFF

ROAD

MOTO CROSS

UTILITY ATV

SPORT ATV

LED headlights and LED position lights

Reflecting its GSX-R heritage, the GSX-R125 features vertically stacked LED headlights, with the low beam above the high beam. and position lights on each side of the headlight. The GSX-R125's LED headlights are bright and compact, lighter and longer lasting compared to conventional halogen-bulb headlights seen on competing machines.



Science of Engine Design

There is a science to building high-performance engines, and the GSX-R125's DOHC engine could be used in a university textbook as an example of how to make a lot of power out of a very efficient and compact powerplant. The objective is combustion efficiency, optimal balance of the sporty engine character and fuel economy.



Dual-Exit Exhaust Muffler The high-performance exhaust system includes a dual-exit muffler. A catalytic converter helps the GSX-R125 meet the Euro4 emission standards, letting everyone breathe a little easier.



Key-Less Ignition System with Answer-Back Function* The GSX-R125 features a convenient key-less ignition system, and the rider can start the engine as long as the compact key is close enough to the motorcycle. A button on the remote control activates

an answer-back function, causing the turn signals to flash and

making it easier to find the GSX-R125 in a crowded parking lot.

*This function is available for Australian Specification.



STREET

SV650X ABS SV650 ABS GSX-S1000 ABS GSX-S1000F ABS GSX-S750 ABS GSX-S125 ABS GSX250R ABS

SV SERIES



All Roads Are Yours

If you're looking to get out on the road on a sporty bike with café racer styling, look no further than Suzuki's SV650X. With its smooth-revving V-Twin engine tucked into a slim and lightweight trellis frame, the SV650X combines power and agility with classic café racer looks. Whether in stop-and-go city traffic or on country roads, this bike delivers exhilaration and riding fun. No matter where you pull up to park, the retro appeal of the SV650X is eye-catching with its stylish slotted headlight cowling, tuck-and-roll seat and blacked-out rider and pillion footrests. And on your favourite stretch of twisties, Suzuki's V-Twin machine's smooth power and agile handling make the SV650X a thrill to ride.





| Engine Type | 4-stroke, 2-cylinder, liquid-cooled, DOHC |
|---------------------|---|
| Engine Displacement | 645 cm ³ |
| Bore x Stroke | 81 mm x 62.6 mm |
| Transmission | 6-speed constant mesh |
| Engine Power | 56 kw (75 PS) / 8 500 rpm |
| Engine Torque | 64 Nm / 8 100 rpm |
| Overall Length | 2 140 mm |
| Overall Width | 730 mm |

| Overall Height | | 1 090 mm |
|----------------|-------|-------------------------------------|
| Wheelbase | | 1 445 mm |
| Ground Cleara | nce | 135 mm |
| Seat Height | | 790 mm |
| Curb Mass | | 198 kg |
| Suspension | Front | Telescopic, coil spring, oil damped |
| | Rear | Link type, coil spring, oil damped |
| Brakes | Front | Disc, twin |

| | Rear | Disc |
|----------------|-------|-------------------------------|
| Tires | Front | 120/70ZR17M/C (58W), tubeless |
| | Rear | 160/60ZR17M/C (69W), tubeless |
| Fuel Tank Capa | acity | 14.5 L |
| Consumption* | | 3.8 L / 100 km |
| CO2 emission* | | 89 g / km |
| | | |

*Calculated based on the Worldwide Motorcycle Test Cycle (WMTC) mode exhaust emissions measuring conditions.



Stylish Slotted Headlight Cowling

The round multi-reflector headlight is equipped with a stylish headlight cowling. Slots in the headlight sides are reminiscent of heritage racers, accentuating the SV650X's personality.



Optional Fog Lamps

The LED fog lamps match the stylish headlight cowling, highlighting the SV650X's intense character. The lamps feature high brightness LED and superior light distribution characteristics.



Clip-on Handlebars Clip-on Handlebars encourage a sporty riding position, and hark back to the days of the original café racers.



Tuck-and-Roll Seat The narrow, streamlined seat exudes retro looks and feel. The seat has soft cushioning, helping reduce rider fatigue, even in a sporty riding position.

SUPER SPORT

STREET

SPORT ADVENTURE TOURER

SCOOTER

OFF

ROAD

MOTO CROSS

UTILITY ATV

SPORT ATV

KIDS ATV

SV SERIES







V-Twin Fun For All Riders

What started in 1999 as a motorcycle built to deliver "V-Twin fun", the Suzuki SV650 quickly became a rider's phenomenon around the world. Not only was this universal motorcycle well-suited for urban roads but it was right at home on the racetrack too. Raising the "V-twin fun machine" performance even higher with latest Suzuki innovations, the SV650's newest version now sets a higher standard.







14.5-litre capacity fuel tank



LED tail & stop lig



Suzuki Easy Start System

| онс | Seat Height | | 785 mm |
|-----|------------------------|-------|-------------------------------------|
| | Curb Mass | | 198 kg |
| | Suspension | Front | Telescopic, coil spring, oil damped |
| | | Rear | Link type, coil spring, oil damped |
| | Brakes | Front | Disc, twin |
| | | Rear | Disc |
| | Tires | Front | 120/70ZR17M/C (58W), tubeless |
| | | Rear | 160/60ZR17M/C (69W), tubeless |
| | Fuel Tank Capa | city | 14.5 L |
| | Consumption* | | 3.8 L / 100 km |
| | $\rm CO_2\ emission^*$ | | 89 g / km |
| | | | |

*Calculated based on the Worldwide Motorcycle Test Cycle (WMTC) mode exhaust emissions measuring conditions.

⊜4

EURO4

SAIS



Metallic Triton Blue / Pearl Glacier White (AGQ)







| Engine Type | 4-stroke, 2-cylinder, liquid-cooled, DOI |
|---------------------|--|
| Engine Displacement | 645 cm ³ |
| Bore x Stroke | 81 mm x 62.6 mm |
| Transmission | 6-speed constant mesh |
| Engine Power | 56 kw (75 PS) / 8 500 rpm |
| Engine Torque | 64 Nm / 8 100 rpm |
| Overall Length | 2 140 mm |
| Overall Width | 760 mm |
| Overall Height | 1 090 mm |
| Wheelbase | 1 445 mm |
| Ground Clearance | 135 mm |
| | |

GSX-S SERIES

Wheelbase

Ground Clearance

1 460mm

140mm



The Pure Sport Roadster

From the DNA of a supersport legend comes the pure sport roadster. The GSX-S1000. A motorcycle built for real-world excitement. Inheriting the genuine engine and main components of the GSX-R1000, this thrilling machine puts the feel of world-beating performance in your hands.





007 102 101

Engine cutaway






Renthal Fatbar



Full-LCD Instrument cluster Photo : GSX-S1000A







Beyond The Sportbike

Go beyond the sportbike.

From the DNA of a supersport legend comes another variation of the pure sport roadster. Beneath the slim fairing of this thrilling machine are the genuine engine and main components of the worldbeating GSX-R1000. All in a comfortable package built for serious on-road pleasure. Hit the road with legendary performance.

Metallic Triton Blue / Glass Sparkle Black (KEL)

Photo : GSX-S1000FA

Pearl Glacier White (YWW)

Photo : GSX-S1000FA

ABS

TCS

EASY START

Curb Mass

Suspension

Brakes

Tires

Fuel Tank Capacity

Consumption*

CO₂ emission*

LOW RPM

ASSIST

4-stroke, 4-cylinder, liquid-cooled, DOHC

III

SCEM

999 cm³

2 115mm

1 180mm

1 460mm

140mm

810 mm

795mm

73.4 mm x 59 mm

6-speed constant mesh

108 Nm / 9 500 rpm

110 kw (148 LE) / 10 000 rpm



STREET

SPORT ADVENTURE TOURER

SCOOTER

ROAD

MOTO CROSS

UTILITY ATV

SUPER

SPORT

999cm3 liquid-cooled engine



raction Control System (STCS

LED tail light



Front brake caliper (Brembo)

Metallic Mat Black No.2 (YKV)

Photo : GSX-S1000FZA

SAIS

⊜4

FIIR04

Inv

122 g / km

Front oi

Rear Lin

Front Dis

Rear Dis

Front

Rear 190

214 kg

SPORT ATV

KIDS ATV

| Inverted telescopic, coil spring, oil damped |
|---|
| Link type, coil spring, oil damped |
| Disc, twin |
| Disc |
| 120/70ZR17M/C (58W), tubeless |
| 190/50ZR17M/C (73W), tubeless |
| 17 L |
| 5.3 L / 100 km |

*Calculated based on the Worldwide Motorcycle Test Cycle (WMTC) mode exhaust emissions measuring conditions.

Fuel Tank Capacity 5.3 L / 100 km



122 g / km

Consumption*

CO₂ emission*





Glass Sparkle Black /

Candy Daring Red (AV4) Photo : GSX-S1000FA

C

Engine Displacement

SFT

Engine Type

Bore x Stroke

Transmission

Engine Power

Engine Torque

Overall Length

Overall Width

Overall Height

Ground Clearance

Wheelbase

Seat Height

SDTV



The Apex Predator

Hear the wild induction roar strike your soul. Feel genuine GSX-R power stir your spirit. Own the apex of every corner. Powered by a legendary supersport engine. Armed with the latest technologies. Tuned to command the streets. Built to reign supreme over naked sport bikes. The GSX-S750 is a true apex predator.





Greater power with fewer emissions the best of both worlds









Variant cross-section swing arm

| | 211 kg [GSX-S750/Z] 213 kg [GSX-S750A/ZA] |
|-------|--|
| Front | Inverted telescopic, coil spring, oil damped |
| Rear | Link type, coil spring, oil damped |
| Front | Disc, twin |
| Rear | Disc |
| Front | 120/70ZR17M/C (58W), tubeless |
| Rear | 180/55ZR17M/C (73W), tubeless |
| city | 16 L |
| | 4.9 L / 100 km |
| | 114 g / km |
| | |

Consumption*


CO₂ emission*


*Calculated based on the Worldwide Motorcycle Test Cycle (WMTC) mode exhaust emissions measuring conditions.



A GSX-S to Revolutionize The Lightweight Class

Suzuki has defined sportbike performance for more than 30 years. It started with the legendary GSX-R line, with more than a million sold worldwide. And the dedicated Suzuki engineers behind the GSX-R line take their responsibilities very seriously : Every GSX-R must be very light and best performing in its class, in an unbeatable package. Now Suzuki engineers have applied their expertise and design philosophy to an exciting new street sport 125cm³-class motorcycle, based on the revolutionary GSX-R125.

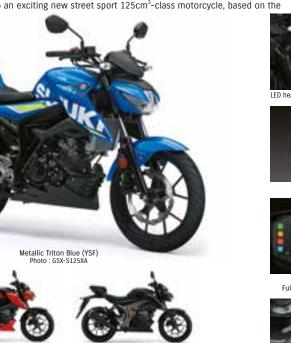



EASY START

4-strok

124 cm

62 mm

6-speed

11 kw (

11,5 Nm

2 020 m

745 m

1 040 m

1 300 m

155 n

0000

SCEM

Engine Type

Bore x Stroke

Transmission

Engine Power

Engine Torque

Overall Length

Overall Width

Overall Height

Ground Clearance

Wheelbase

Engine Displacement

ABS

94

FUR04


Solid Black 50% Gloss (291) Photo : GSX-S125A

> Suzuki Easy Start System, with Shutter-Key Lock

| ke, 1-cylinder, liquid-cooled, DOHC | Seat Height | | 785 mm |
|-------------------------------------|------------------------|-------|-------------------------------------|
| 1 ³ | Curb Mass | | 133 kg |
| x 41.2 mm | Suspension | Front | Telescopic, coil spring, oil damped |
| d constant mesh | | Rear | Link type, coil spring, oil damped |
| (15 PS) / 10 000 rpm | Brakes | Front | Disc |
| m / 8 000 rpm | | Rear | Disc |
| mm | Tires | Front | 90/80-17M/C, tubeless |
| nm | | Rear | 130/70-17M/C, tubeless |
| mm | Fuel Tank Capa | city | 11 L |
| nm | Consumption* | | 2.3 L / 100 km |
| mm | $\rm CO_2 \ emission*$ | | 54 g / km |
| | | | |









Science of Engine Design



Multi-Function, Full LCD Instrument Cluster



*Calculated based on the Worldwide Motorcycle Test Cycle (WMTC) mode exhaust emissions measuring conditions.

Wheelbase

Seat Height

Ground Clearance

1 455 mm

135 mm

820 mm



The Urban Athlete

Sleek, flowing lines invite you to climb aboard and ride into the future. Sporty styling true to Suzuki's sportbike heritage brings instant excitement. Look and feel your best wherever you decide to spread your wings. The new GSX250R is ready to take you beyond mere satisfaction.





| Engine Type | 4-stroke, 2-cylinder, liquid-cooled, SOHC |
|---------------------|---|
| Engine Displacement | 248cm ³ |
| Bore x Stroke | 53.5mvm x 55.2mm |
| Transmission | 6-speed constant mesh |
| Engine Power | 18,4 kw (25 PS) / 8 000 rpm |
| Engine Torque | 23,4 Nm / 6 500 rpm |
| Overall Length | 2 085 mm |
| Overall Width | 740 mm |
| Overall Height | 1 110 mm |
| Wheelbase | 1 430 mm |
| Ground Clearance | 160 mm |
| Seat Height | 790 mm |

| Curb Mass | | 181 kg |
|----------------|-------|---|
| Suspension | Front | Telescopic, coil spring, oil damped |
| | Rear | Swingarm type, coil spring, oil damped |
| Brakes | Front | Disc |
| | Rear | Disc |
| Tires | Front | 110/80-17M/C 57H, tubeless |
| | Rear | 140/70-17M/C 66H, tubeless |
| Fuel Tank Capa | city | 15.4 L |
| Consumption* | | 3.1 L / 100 km |
| CO2 emission* | | 71 g / km |

*Calculated based on the Worldwide Motorcycle Test Cycle (WMTC) mode exhaust emissions measuring conditions.



248 cm³ parallel-twin engine

The 248cm³ parallel-twin engine that powers the GSX250R underwent thorough analysis and optimization to maximize low- to mid-range torque and provide a powerful ride that features ease of control. The overall efficiency achieved also helps realize class-leading level of fuel economy*5 and clean performance that satisfies the stringent Euro 4 emissions. *5 4-stroke 2-cylinder 250cm3 class (As of October 2016)



Full LCD instrumentation

The GSX250R features a reverse-lit LCD instrument panel. Readouts include the speedometer, tachometer, gear position and RPM indicator, odometer, dual tripmeters, fuel gauge, average fuel consumption and oil change timing indicators, and a clock.



Distinctive position lamps and taillight design

Enhancing the sporty, aggressive look and futuristic flair of the GSX250R are newly designed surface-emitting LEDs employed by the position lamps up front and the taillight in the rear. Their smooth edge-to-edge illumination and the chevron-like shape that flanks the headlight create a truly distinctive and highly appealing lighting scheme. Adopting clear lenses for the front and rear turn signals adds to the stylish appearance.



KIDS ATV



Pearl Glacier White No.2 (QHW) Photo : GSX250RA



Pearl Nebular Black (YAY) Photo : GSX250RA SUPER SPORT

STREET

SPORT ADVENTURE TOURER

SCOOTER

OFF ROAD

MOTO CROSS

SPORT ADVENTURE TOURER

V-Strom 1000XT ABS V-Strom 1000 ABS V-Strom 650XT ABS V-Strom 650 ABS V-Strom 250 ABS

V-Strom SERIES

V-Strom 1000XT V-Strom 1000

(DL1000XA/DL1000A)

Supreme Soar

Plentiful Power to conquer the steep mountain passes with a pillion rider, yet still putting a grin on your face with its exciting sportiness. State of the art technology, always there to support a difficult task. Comfort to go on and on, and on. Combining the premium experience with real world usability, the relaxing luxury will let you soar out on your adventures. All you need. V-Strom 1000 ABS.



Glass Sparkle Black (YVB) Photo : V-Strom1000XT ABS



Pearl Glacier White (YWW) Photo : V-Strom1000 ABS



Metallic Oort Gray No.3 (QEB) Photo : V-Strom1000 ABS



Photo : V-Strom1000XT ABS

⊜4



| Engine Type | 4-stroke, 2-cylinder, liquid-cooled, DOHC |
|---------------------|--|
| Engine Displacement | 1037 cm ³ |
| Bore x Stroke | 100 mm x 66 mm |
| Transmission | 6-speed constant mesh |
| Engine Power | 74 kw (100 PS) / 8 000 rpm |
| Engine Torque | 101 Nm / 4 000 rpm |
| Overall Length | 2 280 mm |
| Overall Width | 930 mm |

| Overall Height | | 1 470 mm |
|------------------|-------|--|
| Wheelbase | | 1 555 mm |
| Ground Clearance | | 165 mm |
| Seat Height | | 850 mm |
| Curb Mass | | 233 kg [V-Strom 1000XT ABS] 232 kg [V-Strom 1000 ABS] |
| Suspension | Front | Inverted telescopic, coil spring, oil damped |
| | Rear | Link type, coil spring, oil damped |

| Brakes | Front | Disc, twin |
|---------------------------|-------|----------------------------|
| | Rear | Disc |
| Tires | Front | 110/80R19M/C 59V, tubeless |
| | Rear | 150/70R17M/C 69V, tubeless |
| Fuel Tank Capacity | | 20 L |
| Consumption* | | 4.8 L / 100 km |
| CO ₂ emission* | | 112 g / km |
| | | |

*Calculated based on the Worldwide Motorcycle Test Cycle (WMTC) mode exhaust emissions measuring conditions.



Irresistible Power

The powerful and versatile 90-degree DOHC V-twin originated as a 996cm³ unit, and underwent a major rebuild changing various components and rising the capacity to 1037cm in 2014, further maturing this attractive engine to match the demands of a sports adventure tourer.



OFF

ROAD

MOTO CROSS

UTILITY ATV

SPORT ATV

KIDS

ATV

Motion Track Brake System and Combination Brake system The Bosch ABS system has been upgraded to the "Motion Track

Brake System" by installing a 5-Axis Inertial Measurement Unit (IMU), and by combining the information of the posture of the vehicle with the front and rear wheel speeds, realizing optimal vehicle stability not only in straight-line braking but also when breaking while cornering.



Excellent Flow of Wind for Individual Riders The effective windscreen on the V-Strom 1000 ABS inherits the ratchet-gear mechanism allowing the rider to easily choose from three angles. No tools are necessary and the ideal position can be selected by simply pushing the windscreen by one hand, even with gloves on.



Choice of Wheels

19 inch wheel on the front and 17 on the rear provides a premium balance of stability and nimbleness to cope well with all riding situations. The V-Strom 1000 ABS inherits the light weight 10 spoke aluminum cast wheels, while the V-Strom 1000XT adopts tubeless tire applicable wire-spoke wheels.

STREET

SPORT ADVENTURE TOURER

SCOOTER

V-Strom SERIES



(DL650XA/DL650A)

Adventure, In All Directions

The ultimate tackle to Do-It-All. The tool that never lets you down. Think of a task, a challenge, an adventure. The answer to every thought. V-Strom 650.



Glass Sparkle Black (YVB) Photo : V-Strom 650XT ABS



Pearl Glacier White (YWW) Photo : V-Strom 650 ABS



Champion Yellow No.2 (YU1) Photo : V-Strom 650XT ABS



| Engine Type | 4-stroke, 2-cylinder, liquid-cooled, DOHC |
|---------------------|--|
| Engine Displacement | 645 cm ³ |
| Bore x Stroke | 81 mm x 62.6 mm |
| Transmission | 6-speed constant mesh |
| Engine Power | 52 kw (70 PS) / 8 800 rpm |
| Engine Torque | 62 Nm / 6 500 rpm |
| Overall Length | 2 275 mm |

| Overall Width | 910 mm [V-Strom 650XT ABS] 835 mm [V-Strom 650 ABS] |
|------------------|--|
| Overall Height | 1 405 mm |
| Wheelbase | 1 560 mm |
| Ground Clearance | 170 mm |
| Seat Height | 835 mm |
| Curb Mass | 216 kg [V-Strom 650XT ABS] 213 kg [V-Strom 650 ABS] |
| Suspension Front | Telescopic, coil spring, oil damped |

| | Rear | Link type, coil spring, oil damped |
|--------------------------|-------|------------------------------------|
| Brakes | Front | Disc, twin |
| | Rear | Disc |
| Tires | Front | 110/80R19M/C 59V, tubeless |
| | Rear | 150/70R17M/C 69V, tubeless |
| Fuel Tank Capacity | | 20 L |
| Consumption* | | 4.1 L / 100 km |
| CO ₂ emissin* | | 94 g / km |

*Calculated based on the Worldwide Motorcycle Test Cycle (WMTC) mode exhaust emissions measuring conditions.





Sophisticated V-Twin Performance

The 645cm³ DOHC V-twin is a masterpiece of Suzuki engineering which has an evolving history. For the new 650, this unit has been tuned for ample low to mid-range torque for practical use while maintaining an exhilarating top-end.



Advanced Traction Control System

The V-Strom 650 now also features the 3 mode (2 modes and off) traction control system already proven on the V-Strom 1000. Simple to use and effective in difficult road conditions, this advanced system is designed to prevent spin due to excessive throttle control and support riders in various conditions they are likely to face in long distance tours.



Head Light

The high and low beam of the light weight headlight is in a compact vertical configuration and realize brightness equivalent to the previous twin head lights, while when on high beam, both low and high bulbs illuminate providing a broader lit up area.



Multi-function instrument panel

By sharing the easy to see and easy to operate/understand instrument cluster, along with the cowling image with its bigger brother, the new 650 now has rich information with a quality design.

V-Strom SERIES

V-Stron 250 (DL250A)



Massive And Smart

The new V-Strom 250 ABS is equally at home in city traffic as it is on the open road when touring. Featuring a comfortable riding position and enabling riders to firmly reach the ground with their feet, this new model also delivers plenty of power and easy to control low- to mid-range torque.



Metallic Diamond Red (YYW)



Pearl Nebular Black (YAY)



Pearl Nebular Black (YAY) / Solid Dazzling Cool Yellow (YWT)



| Engine Type | 4-stroke, 2-cylinder, liquid-cooled, SOHC |
|---------------------|--|
| Engine Displacement | 248 cm ³ |
| Bore x Stroke | 53.5 mm x 55.2 mm |
| Transmission | 6-speed constant mesh |
| Engine Power | 18,4 kw (25 PS) / 8 000 rpm |
| Engine Torque | 23,4 Nm / 6 500 rpm |
| Overall Length | 2 150 mm |
| Overall Width | 790 mm |

| Overall Height | | 1 295 mm |
|------------------|-------|---|
| Wheelbase | | 1,425 mm |
| Ground Clearance | | 160 mm |
| Seat Height | | 800 mm |
| Curb Mass | | 188 kg |
| Suspension | Front | Telescopic, coil spring, oil damped |
| | Rear | Swingarm type, coil spring, oil damped |
| Brakes | Front | Disc |

| | Rear | Disc |
|---|-------|----------------------------|
| Tires | Front | 110/80-17M/C 57H, tubeless |
| | Rear | 140/70-17M/C 66H, tubeless |
| Fuel Tank Capacity | | 17.3 L |
| Consumption* CO ₂ emission* | | 3.2 L / 100 km |
| | | 72 g / km |
| | | |

*Calculated based on the Worldwide Motorcycle Test Cycle (WMTC) mode exhaust emissions measuring conditions.





Headlight and Rear combination lights The metal shell surrounding the headlight features a hard anodized finish and is designed to resemble a flashlight. The taillight adopts a surface-emitting LED.



248cm³ parallel-twin engine

The 248cm³ parallel-twin engine that powers the V-Strom 250/ABS underwent thorough analysis and optimization to maximize low- to mid-range torque and provide a powerful ride that features ease of control. The overall efficiency achieved also helps realize better fuel economy and clean performance that satisfies the stringent Euro 4 emission regulations.



Full LCD instrumentation

The V-Strom 250/ABS features a reverse-lit LCD instrument panel. Readouts include the speedometer, tachometer, gear position and RPM indicator, odometer, dual tripmeters, fuel gauge, average fuel consumption and oil change timing indicators, and a clock. LED indicators include those for the turn signals, high beam, neutral, malfunction, ABS (Only for ABS model), RPM indicator, coolant temperature and oil pressure. The indicators are designed to be easy to recognize. SUPER SPORT

SPORT ADVENTURE TOURER

SCOOTER

OFF ROAD

MOTO

CROSS

UTILITY ATV

SPORT ATV

KIDS

ATV

BURGMAN 650 Executive BURGMAN 400 ABS BURGMAN 200 ABS BURGMAN 125 ABS Address 110

SCOOTE

BURGMAN SERIES





(AN650Z)

Looking ahead on luxury

BURGMAN. The name is synonymous with two-wheel luxury. For an entire generation of riders, BURGMAN has redefined the motorcycling experience. Control has never come so freely. Power has never flowed with such ease. Every movement feels smooth and graceful. Every street is yours for the taking. BURGMAN 650. Looking ahead on luxury.



Metallic Mat Fibroin Gray (YWW) Photo : Burgman 650 Executive







Pearl Glacier White (PGZ) Photo : Burgman 650 Executive



| Engine Type | 4-stroke, 2-cylinder, liquid-cooled, DOHC |
|---------------------|--|
| Engine Displacement | 638 cm ³ |
| Bore x Stroke | 75.5 mm × 71.3 mm |
| Transmission | CVT |
| Engine Power | 39,5 kw (54 PS) / 7 000 rpm |
| Engine Torque | 58,4 Nm / 4 750 rpm |
| Overall Length | 2 265 mm |
| Overall Width | 810 mm |

| Overall Height | | 1 420 mm |
|----------------|-------|---|
| Wheelbase | | 1 585 mm |
| Ground Clearar | ice | 125 mm |
| Seat Height | | 760 mm |
| Curb Mass | | 277 kg |
| Suspension | Front | Telescopic, coil spring, oil damped |
| | Rear | Swingarm type, coil spring, oil damped |

| Brakes | Front | Disc, twin |
|---------------------------|-------|----------------------------|
| | Rear | Disc |
| Tires | Front | 120/70R15M/C 56H, tubeless |
| | Rear | 160/60R14M/C 65H, tubeless |
| Fuel Tank Capacity | | 15 L |
| Consumption* | | 4.8 L / 100 km |
| CO ₂ emission* | | 109 g / km |

*Calculated based on the Worldwide Motorcycle Test Cycle (WMTC) mode exhaust emissions measuring conditions.



SUPER SPORT

SPORT ADVENTURE TOURER

OFF

ROAD

MOTO CROSS

ATV

Headlights with LED position lights

Slim, sharply styled multi-reflector headlights announce the BURGMAN 650's arrival and keep the road ahead in focus. They're both lit whether you choose high beams or low. Sparkling LED position lights help to heighten visibility, as do turn signals in the rearview mirrors.



Front compartments with DC outlet

Three compartments below the handlebars provide space for maps and other items you might need on the road. One contains a DC outlet that's ideal for charging a mobile telephone.



50-litre underseat storage

The BURGMAN 650 has room for plenty of gear. A cavernous, 50-litre underseat compartment can hold two full-face helmets and has a light for nighttime convenience. A cable lock allows you to secure a helmet outside the compartment to make space for luggage inside.



Informative instruments

Big, easy-to-read analogue dials for the speedometer and tachometer flank a digital display that shows an odometer, twin trip meters, a fuel consumption meter, a fuel meter, a coolant temperature indicator, a thermometer, a clock, an oil level indicator, an oil change indicator, a drive mode indicator (for drive mode and power mode), and a gear position indicator (for manual mode). SPORT

ATV

BURGMAN SERIES



The Elegant Athlete

It fits well, like a fine handmade suit. It rides comfortably and performs like a champion. It manoeuvres brilliantly. And it delivers a winning combination of stylish design, practicality and convenience. The BURGMAN 400 – bringing greater class and pleasure to your journey.



Pearl Glacier White (YWW)



Metallic Mat Fibroin Gray (PGZ)

SCEM ABS SAIS EURO4

| Engine Type | 4-stroke, 1-cylinder, liquid-cooled, DOHC |
|---------------------|--|
| Engine Displacement | 400 cm ³ |
| Bore x Stroke | 81 mm x 77.6 mm |
| Transmission | CVT |
| Engine Power | 23kw (31 PS) / 6 300 rpm |
| Engine Torque | 36 Nm / 4 800 rpm |
| Overall Length | 2 235 mm |

| Overall Width | | 765 mm |
|---------------------------------|-------|-------------------------------------|
| Overall Height | | 1 350 mm |
| Wheelbase | | 1 580 mm |
| Ground Clearance Seat Height | | 125 mm |
| | | 755 mm |
| Curb Mass | | 215 kg |
| Suspension | Front | Telescopic, coil spring, oil damped |
| | Rear | Link type, coil spring, oil damped |

NEW

| Brakes | Front | Disc, twin |
|---------------------------|-------|----------------------------|
| | Rear | Disc |
| Tires | Front | 120/70-15M/C 56S, tubeless |
| | Rear | 150/70-13M/C 64S, tubeless |
| Fuel Tank Capacity | | 13.5 L |
| Consumption* | | 4 L / 100 km |
| CO ₂ emission* | | 91 g / km |

Metallic Mat Black No.2 (YKV)

*Calculated based on the Worldwide Motorcycle Test Cycle (WMTC) mode exhaust emissions measuring conditions.





Elegant and efficient LED headlight design

The slim, elegant styling of the new nose features sharply styled dual LED headlights with integrated LED position lights and turn signals mounted beneath. The overall effect creates a cleaner and lighter looking front end that is instantly recognizable as belonging to the BURGMAN family.



Link-Type Monoshock Rear Suspension The link-type monoshock rear suspension with 7-way adjustable spring preload helps maximise the balance between comfort and sporty performance by providing a softer ride on relatively smooth roads and solid traction on cobblestone streets.



Light, Lean and Lavishly Appointed The new BURGMAN 400 makes no compromises on elegant styling, even while shedding weight over its predecessor. From the sharp, lean lines of it new nose to the slim new rear end, this BURGMAN clearly personifies fine craftsmanship, technological provess and dedication to quality.



Rich Underseat Storage Space

The BURGMAN 400's spacious 42-litre underseat storage"⁶ compartment can hold two helmets⁻⁷ and provides ample room for stowing your gear.

*6 The weight limit for items in the underseat compartment is 10kg. *7 One full-face and one demi-jet helmet may fit in the underseat compartment. Helmets of certain shapes may not fit in the underseat compartment. Helmets and luggage items are shown for illustrative purposes only. Do not use the stoage compartments for items that are fagle, valuable, dargerous or susceptible to heat.

BURGMAN SERIES



Urban Smart

The freedom comes in the sporty form of the BURGMAN. Like the city itself, the BURGMAN pulses with originality. It's loaded with well-designed space for carrying what you need. See how smooth two-wheel urban riding can be. Get out there and find your true self in the city.





Get Around All-Rounder

Titan Black (YVU)

4-stroke, 1-cylinder, air-cooled, SOHC

Brilliant White (YUH)

51 mm × 55.2 mm

8.6 Nm / 6 250 rpm

1 845 mm

665 mm

1 095 mm

1 260 mm

120 mm

6.5 kW (9 PS) / 8 000 rpm

CVT

EUR04

Engine Type

Bore x Stroke

Transmission

Engine Power

Engine Torque

Overall Length

Overall Width

Overall Height

Ground Clearance

Wheelbase

Engine Displacement 113 cm³

A lifestyle statement that says as much about your personality as where you want to go, this head-turning, street-smart all-rounder is more than a stylish commuter. Sporting breathtaking acceleration and optimized fuel economy, and an accommodating 20.6 liter luggage compartment that provides more than ample room for your helmet and riding gear. Plus, the sleek city dimension makes every ride - whether it's to the school or office, shopping runs - a sheer exciting.

Metallic Triton Blue (YSE





SPORT ADVENTURE

ROAD

MOTO CROSS

UTILITY ATV



Fuel injection system with six sensors



Underseat storage

SPORT ATV

Front inner nocket

KIDS ATV

| Seat Height | | 755 mm |
|------------------------|-----------|---------------------------------------|
| Curb Mass | | 100 kg |
| Suspension | Front | Telescopic, coil spring, oil damped |
| | Rear | Swingarm type, coil spring,oil damped |
| Brakes | Front | Disc |
| | Rear | Drum |
| Tires | Front | 80/90-14M/C 40P, tubeless |
| | Rear | 90/90-14M/C 46P, tubeless |
| Fuel Tank Capacity | | 5.2 L |
| Consumption* | | 2.1 L / 100 km |
| $\rm CO_2\ emission^*$ | | 49 g / km |
| | (1111170) | |

Underseat storage ⊜4 Multi-function instrument

16,8 Nm / 6 000 rpm | 10 Nm / 6 300 rpm Engine Torque **Overall Length** 2 055 mm Tires Overall Width 740 mm Overall Height 1 355 mm Fuel Tank Wheelbase 1 465 mm Consum Ground Clearance 130 mm CO₂ emiss

| gin | | 755 11111 |
|---------|-------|--|
| SS | | 164 kg 162 kg |
| ion | Front | Telescopic, coil spring, oil damped |
| | Rear | Swingarm type, coil spring, oil damped |
| | Front | Disc |
| | Rear | Disc |
| | Front | 110/90-13M/C 56P, tubeless |
| | Rear | 130/70-12 62P, tubeless |
| k Capao | city | 10.5 L |
| ption* | | 3.2 L / 100 km 3 L / 100 km |
| sion* | | 76 g / km 68 g / km |
| | | |

*Calculated based on the Worldwide Motorcycle Test Cycle (WMTC) mode exhaust emissions measuring conditions.

OFF ROAD

DR-Z125L

DR-Z SERIES



Two For The Trails

Blending race inspired looks along with an exciting entry-level off road package creates the DR-Z125L. Built around a time proven chassis and engine package. Inheriting sleek designs from its RM-Z brothers, the DR-Z125/L yields motocross styling that looks good at the local track or a favorite trail.



| Engine Type | 4-stroke, 1-cylinder, air-cooled, SOHC |
|---------------------|--|
| Engine Displacement | 124 cm ³ |
| Bore x Stroke | 57 mm x 48.8 mm |
| Transmission | 5 -speed constant mesh |
| Overall Length | 1 885 mm |
| Overall Width | 770 mm |
| Overall Height | 1 110 mm |
| Wheelbase | 1 270 mm |
| Ground Clearance | 290 mm |

| Seat Height | | 805 mm |
|--------------------|-------|-------------------------------------|
| Curb Mass | | 89kg |
| Suspension | Front | Telescopic, coil spring, oil damped |
| | Rear | Link type, coil spring, oil damped |
| Brakes | Front | Disc |
| | Rear | Drum |
| Tires | Front | 70/100-19 42M, tube type |
| | Rear | 90/100-16 52M, tube type |
| Fuel Tank Capacity | | 4.8 L |



SPORT ADVENTURE TOURER

SCOOTER

MOTO CROSS

UTILITY ATV

SPORT ATV

KIDS ATV

Lightweight engine skid plate



Link-type rear suspension



Telescopic front forks



Front disc brake

MOTOCROSS

a

RM-Z450 RM-Z250

RM-Z SERIES





The Winning Balance

Stripped to its essence, motocross requires a racebike to do three key things: Run, Turn and Stop - all better than the rest. Now in its 14th model year, the RM-Z450 is fully redesigned with a laser focus on achieving this winning balance. Fortunately, the RM-Z450 already has a heritage of 26world and national championships to build on, including five AMA 450 Motocross and two AMA 450 Supercross titles. To this winning history now comes fully re-engineered engine, chassis and electronics, plus dramatic new styling. The result? The most potent, balanced and competitive RM-Z450 yet.





(V.R)

Increased engine performance



(BFRC)



Suzuki Holeshot Assist Control (S-HAC)



SCEM

Engine Type

Bore x Stroke

Transmission

Overall Length

Overall Width

Overall Height

Ground Clearance

Wheelbase

S-HAC

Engine Displacement 249 cm³

DOHC

2 170 mm

830 mm

1 270 mm

1 475 mm

345 mm

77 mm x 53.6 mm

5-speed constant mesh



| Engine Type | 4-stroke, 1-cylinder, liquid-cooled, DOHC |
|---------------------|--|
| Engine Displacement | 449 cm ³ |
| Bore x Stroke | 96 mm × 62.1 mm |
| Transmission | 5-speed constant mesh |
| Overall Length | 2 175 mm |
| Overall Width | 835 mm |
| Overall Height | 1 260 mm |
| Wheelbase | 1 480 mm |
| Ground Clearance | 330 mm |

| Seat Height | | 960 mm |
|--------------------|-------|--|
| Curb Mass | | 112 kg |
| Suspension | Front | Inverted telescopic, coil spring, oil damped |
| | Rear | Link type, coil spring, oil damped |
| Brakes | Front | Disc |
| | Rear | Disc |
| Tires | Front | 80/100-21 51M, tube type |
| | Rear | 110/90-19 62M, tube type |
| Fuel Tank Capacity | | 6.3 L |



Race Ahead. Ride to Win.

The holeshot can be yours, and that's just the beginning. The 2018 Suzuki 250 delivers innovative technology and engineering updates desgined to launch you to the front of the pack and lead you to the checkered flag.

Champion Yellow No.2 (YU1)

4-stroke, 1-cylinder, liquid-cooled,



SUPER SPORT

SPORT ADVENTURE



PSF2 front fork (KYB's Pneumatic Spring Fork)



TOURER

Suzuki Holeshot Assist Control (S-HAC)

UTILITY ATV SPORT ATV



Lightweight front brake caliper and Dunlop MX52 series tires

| Seat Height | | 955 mm |
|--------------------|-------|---|
| Curb Mass | | 106 kg |
| Suspension | Front | Inverted telescopic, air spring, oil damped |
| | Rear | Link type, coil spring, oil damped |
| Brakes | Front | Disc |
| | Rear | Disc |
| Tires | Front | 80/100-21 51M, tube type |
| | Rear | 100/90-19 57M, tube type |
| Fuel Tank Capacity | | 6.5 L |





30

UTILITY ATV

KINGOUND

KINGQUAD 750AXi 4x4 Power Steering OZARK 250

KINGQUAD SERIES



Wherever Your Road Leads

Suzuki's premium utility/sport ATV, powered by a fuel-injected 4-valve 722cm³ engine tuned to deliver a mighty low-to-mid range torque. The machine for those who need the best of every feature. Eletric power steering offering steering assistance when the rider needs it or the ground demands it.



Terra Green (YLG)

True Timber XD3 (PHW) Photo : LT-A750XP (LT-A750XP Only)

Rugged steel tube cargo racks



Efficient and functional fully automatic Quadmatic CVT transmission



Convenient handlebar-mounted control



instrument display

Engine Type

Bore x Stroke

Transmission

Overall Length

Overall Width

Overall Height

Ground Clearance

Wheelbase

Seat Height

Engine Displacement 246 cm³

| Engine Type | 4-stroke, 1-cylinder, liquid-cooled, DOHC |
|---------------------|--|
| Engine Displacement | 722 cm ³ |
| Bore x Stroke | 104 mm x 85 mm |
| Transmission | CVT, 2-speed forward with reverse |
| Overall Length | 2 115 mm |
| Overall Width | 1 210 mm |
| Overall Height | 1 285 mm |
| Wheelbase | 1 285 mm |
| Ground Clearance | 260 mm |
| Seat Height | 920 mm |

0000

SCEM

| Curb Mass | | 305 kg |
|--------------------|-------|--|
| Suspension | Front | Independent, double wishbone, coil spring, oil damped |
| | Rear | Independent, double wishbone, coil spring, oil damped |
| Brakes | Front | Disc, twin |
| | Rear | Disc |
| Tires | Front | AT25x8-12 $^{\rm triv}$, tubeless |
| | Rear | AT25x10-12 $^{\rm triv}$, tubeless |
| Fuel Tank Capacity | | 17.5 L |
| | | |

*North American Spec. shown



Practical, Convenient, Value, Fun

Four simple words. Seemingly worlds apart. Yet joined by one remarkable machine. Practical and at home on the farm, the ranch, the job site. Convenient to use with electric start, an automatic clutch, a five-speed transmission with reverse. Delivering good value with great features and a proven, low-maintenance design. Ready for fun when the work is done. The Suzuki OZARK 250. Waiting for you.



STREET

SPORT

ADVENTURE TOURER

SCOOTER

ROAD

MOTO CROSS

SPORT ATV



Curb Mass

Suspension

Brakes

Tires

Fuel Tank Capacity

4-stroke, 1-cylinder, air-cooled, SOHC

5-speed forward with reverse

66 mm x 72 mm

1 870 mm

1 070 mm

1 070 mm

1 140 mm

210 mm

785 mm



Ample steel-tube bumper and grill guard

Front AT22x7-11th, tubeless

Rear AT22x10-9th , tubeless

Disc, twin

9.7 L

Front

Rear

Front

Rear Disc

| | KIDS |
|---|------|
| 198 kg | ATV |
| Independent, double wishbone, coil spring, oil damped | |
| Swingarm type, coil spring, oil damped | |
| Disc twin | |

*North American Spec. shown

SPORT&KIDS ATV

SPORT ATV QuadSport Z400 KIDS ATV QuadSport Z90

QUADSPORT SERIES



Engineered For Fun

Looking forward to carving the face of a sand dune? Splashing through a creek crossing? Picking a path up a rocky desert canyon? Engineered for fun, the QuadSport Z400 stands ready to transport you to such moments with torque-loaded performance, sporty chassis and an aggressive styling.







0000 SCEM

| Engine Type | 4-stroke, 1-cylinder, air-cooled, SOHC |
|---------------------|--|
| Engine Displacement | 398 cm ³ |
| Bore x Stroke | 90 mm x 62.6 mm |
| Transmission | 5-speed forward with reverse |
| Overall Length | 1 830 mm |
| Overall Width | 1 190 mm |
| Overall Height | 1 145 mm |
| Wheelbase | 1 245 mm |
| Ground Clearance | 265 mm |
| Seat Height | 810 mm |

| Curb Mass | | 193 kg |
|--------------------|-------|---|
| Suspension | Front | Independent, double wishbone, coil spring,oil damped |
| | Rear | Swingarm type, coil spring, oil damped |
| Brakes | Front | Disc, twin |
| | Rear | Disc |
| Tires | Front | AT22x7R10 |
| | Rear | AT20x10R9*** , tubeless |
| Fuel Tank Capacity | | 9.1 L |
| | | |

*North American Spec. shown

398cm3 liquid-cooled engine

SCEM plated cylinder

Double-wishbone front suspention

T-shaped seat

0000

SCEM

Engine Type Engine Displacement

Bore x Stroke Transmission

Overall Length

Overall Width

Overall Height

Ground Clearance

Wheelbase

Seat Height



Fun Redefined

Suzuki redefines fun with the QuadSport Z90. This youth-sized four-stroke machine is the perfect compliment to your adult-sized four-stroke machine. Value, aggressive QuadSport Z400-like styling, ease of use, reliability, these are the traits of the QuadSport Z90.

SUPER SPORT



4-stroke, 1-cylinder, air-cooled, SOHC

90 cm³

CVT

1 505 mm

875 mm

915 mm

1 005 mm

150 mm

650 mm

45.5 mm x 55.2 mm



TOURER SCOOTER

SPORT ADVENTURE

T-shaped seat



MOTO CROSS

OFF ROAD



Front bumper

| Curb Mass | | 127 kg |
|--------------------|-------|---|
| Suspension | Front | Independent, double wishbone, coil spring, oil damped |
| | Rear | Swingarm type, coil spring, oil damped |
| Brakes | Front | Drum |
| | Rear | Drum |
| Tires | Front | AT19x7-8 $^{\scriptscriptstyle \rm th}$, tubeless |
| | Rear | AT19x7-8☆ , tubeless |
| Fuel Tank Capacity | | 6 L |
| | | |



MotoGP

Motocross Super Sport

Suzuki race bikes are born and refined on our test track, waiting to be ridden fast. They leave their birthplace, fueled with our strong passion and our craving hope for victory. At this very place, new bikes are about to be born, bikes which have inherited the same blood of our polished and battle-hardened racers,brought up in the unsparing world of competition.

Motorcycles, racing through the circuit, fighting for the podium just milliseconds away-Motorcycles, cruising through everyday life, hand in hand with its proud and confident owner- Motorcycles, sitting quietly in a garage, waiting for that push on the ignition, the rumble of the engine-

Hoping for the future, for all of our precious encounters and glorious days to come

SUZUKI GENUINE PARTS

IN CAUNTIE MAD

Every Suzuki motorcycle is built with genuine parts. They have the optimal design and specifications tailored for the specific motorcycle type and model. Every part has passed Suzuki's rigorous test standards for performance, quality, durability, safety and comfort. We recommend that you choose Suzuki genuine parts when you need to repair your motorcycle. Each genuine part is the perfect match for your Suzuki motorcycle. By choosing Suzuki genuine parts and service, you can maintain your Suzuki in top condition.

\$ BUZUKI

WHEEL BEARING KIT.

Safety Information

MOTOCROSS

\$ SUZUKI

DRIVE CHAIN KIT

AUNTINE PAR

The RM-Z450, RM-Z250 vare for closedcourse competition and related practices use only. Always supervise young riders.

UTILITY ATV

\$ SUZUKI

STREET, PART

MAINTENANCE KIT

The Suzuki KINGQUAD 750AXi 4x4 Power Steering (LT-A750XP), OZARK 250 (LT-F250) may be used only by those aged 16 and older. ATVs can be hazardous to operate. For your safety, always wear a helmet, eye protection and protective clothing. Always avoid paved surfaces. Never ride on public roads. Never carry passengers or engage in stunt riding. Riding and alcohol or other drugs don't mix. Avoid excessive speed. Be extra careful on difficult terrain. Read your Owner's Manual carefully.

SPORT ATV

The Suzuki QuadSport Z400 (LT-Z400) is engineered for experienced riders, and is may be used only by those aged 16 and older. ATVs can be hazardous to operate. For your safety, always wear a helmet, eye protection and protective clothing. Always avoid paved surfaces. Never ride on public roads. Never carry passengers or engage in stunt riding. Riding and alcohol or other drugs don't mix. Avoid excessive speed. Be extra careful on difficult terrain. Read your Owner's Manual carefully.

KIDS ATV

\$ SUZUKI DEADLET, PARTS

CLUTCH PLATE KIT

STEERING STEM BEARING KIT

S NUCLEAR BRAKE REBUILD

FORK SEAL KIT

The Suzuki OuadSport Z90 (LT-Z90) may be used by those aged 12 and older. Adult must always supervise riders under the age of 16. ATVs can be hazardous to operate. For your safety, always wear a helmet, eye protection and protective clothing. Always avoid paved surfaces. Never ride on public roads. Never carry passengers or engage in stunt riding. Never exceed the Suzuki QuadSport Z90 (LT-Z90) load capacity of 90kg. Riding and other drugs don't mix. Avoid excessive speed. Be extra careful on difficult terrain. Read your Owner's Manual carefully.

Specifications, appearance, colors, (including body color), equipment, materials and other aspects of the "SUZUKI" products shown in the brochure are subject to change by Suzuki at any time without notice, and they may vary depending on local conditions or requirements. Some models are not available in some territories. Each model may be discontinued without notice. Please inquire at your local dealer for details of any such changes. Image contains computer-generated composites.

Always wear a helmet, eye protection and protective clothing. Enjoy riding safety.
Read your Owner's Manual carefully. Never ride under the influence of alcohol or other drugs.
MAGYAR SUZUKI ZRT.





Suzuki's "Way of Life!" is the heart of our brand - every Suzuki vehicle, motorcycle and outboard motor is built to create excitement so customers can enjoy everyday life.



Way of Life!

*Professional rider in closed course.